
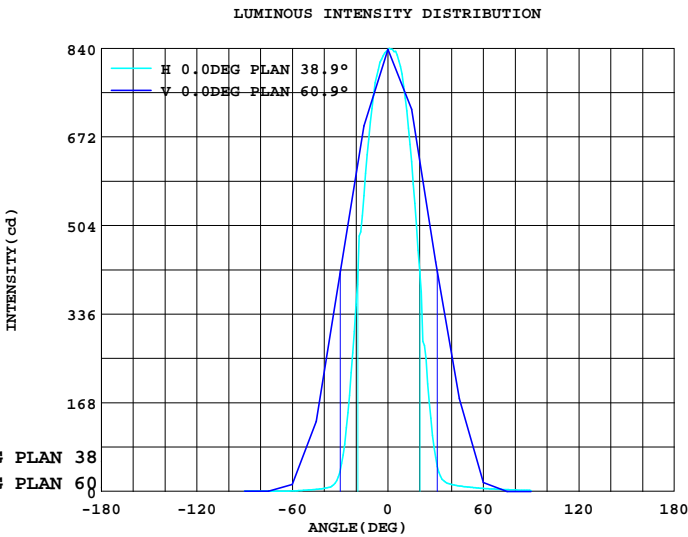


LUMINAIRE PHOTOMETRIC TEST REPORT

Report number:

MANUFACTURER: LI-TIAN LIGHTING			
Address:			
NAME: SL-8W-30K-40X70D		TYPE:	WEIGHT:
SPECIFICATION:	CCT(K): 0	DIMENSION:	SERIAL No.:

MODEL:					
NOMINAL POWER(W):	9	Imax(cd):	840.1	Voltage(V)	219.8
RATED VOLTAGE(V):	220	AVAILABILITY(%):	93.6	Current(A)	0.067
NOMINAL FLUX(lm):	593.9	Avai. FLUX(lm):	555.8	Power(W)	9.160
TEST FLUX(lm):	593.9	EFFICIENCY(%):	100.0	Power Factor(PF)	0.613
LAMPS QUANTITY :	1	TOTAL FLUX(lm):	593.9	EFFICIENCY(lm/W)	64.8
Effictive Flux(lm) :	555.8	θ @50%(H, V):	38.9,60.1DEG	EEl:	0.191

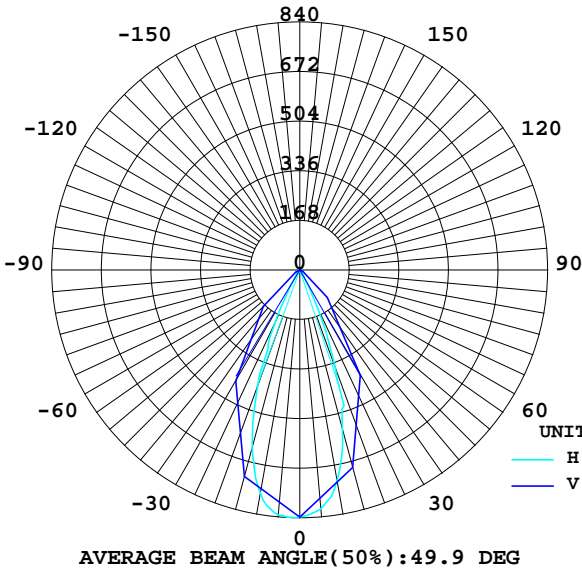

Test System:HOPOO HPG1900
Temperature:25.3DEG
Operators:
Test Date:2024年07月19日

Test Set: 8.0deg/s B-Beta (TYPE B)
Humidity:65.0%
Test Distance:10.500 m
Remarks:

Color Temperature Data List

Report number:

MANUFACTURER: LI-TIAN LIGHTING			
Address:			
NAME: SL-8W-30K-40X70D		TYPE:	WEIGHT:
SPECIFICATION:	CCT(K): 0	DIMENSION:	SERIAL No.:


Test System:HOPOO HPG1900
Temperature:25.3DEG
Operators:
Test Date:2024年07月19日

Test Set: 8.0deg/s B-Beta (TYPE B)
Humidity:65.0%
Test Distance:10.500 m
Remarks:

AVERAGE AND CENTER E Figure

Report number:

MANUFACTURER: LI-TIAN LIGHTING			
Address:			
NAME: SL-8W-30K-40X70D		TYPE:	WEIGHT:
SPECIFICATION:	CCT(K): 0	DIMENSION:	SERIAL No.:

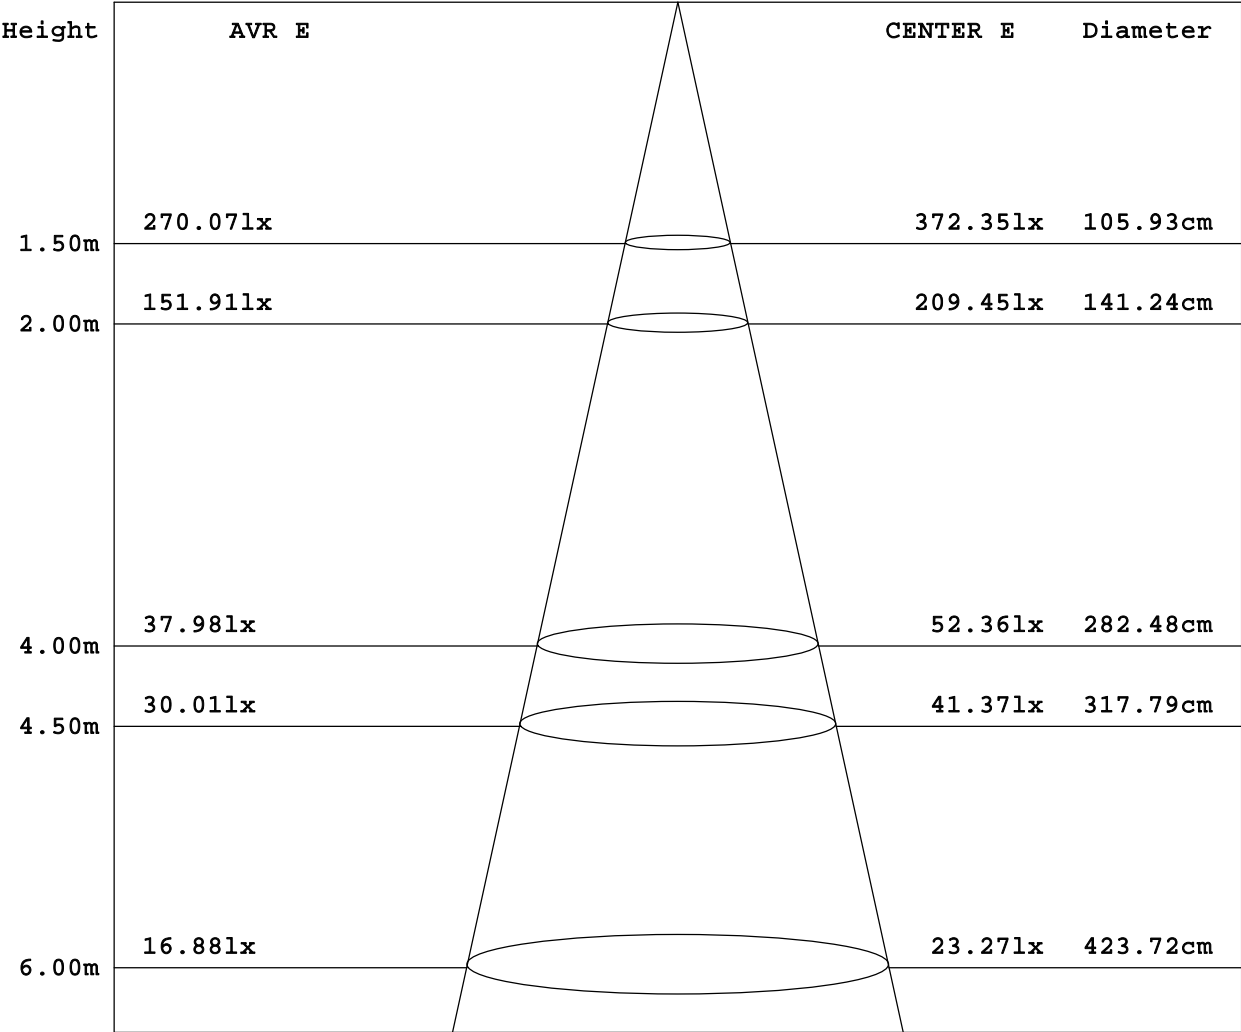

Angle:38.9deg

Test System:HOPOO HPG1900
Temperature:25.3DEG
Operators:
Test Date:2024年07月19日

Test Set: 8.0deg/s B-Beta (TYPE B)
Humidity:65.0%
Test Distance:10.500 m
Remarks:

HOPOO GONIOPHOTOMETERS SYSTEM TEST REPORT

AREA LUMINOUS FLUX

Report number:

MANUFACTURER: LI-TIAN LIGHTING																			
Address:																			
NAME: SL-8W-30K-40X70D										TYPE:					WEIGHT:				
SPECIFICATION:					CCT(K): 0					DIMENSION:					SERIAL No.:				

VERTICAL (DEG)	AREA FLUX DIAGRAM																		UNIT:lm		Φ t	Φ a
	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00		
90																						
80																						
70																						
60																						
50																						
40																						
30																						


Test System:HOPOO HPG1900
Temperature:25.3DEG
Operators:
Test Date:2024年07月19日

Test Set: 8.0deg/s B-Beta (TYPE B)
Humidity:65.0%
Test Distance:10.500 m
Remarks:

ISOLUX DIAGRAM

Report number:

MANUFACTURER: LI-TIAN LIGHTING			
Address:			
NAME: SL-8W-30K-40X70D		TYPE:	WEIGHT:
SPECIFICATION:	CCT(K): 0	DIMENSION:	SERIAL No.:

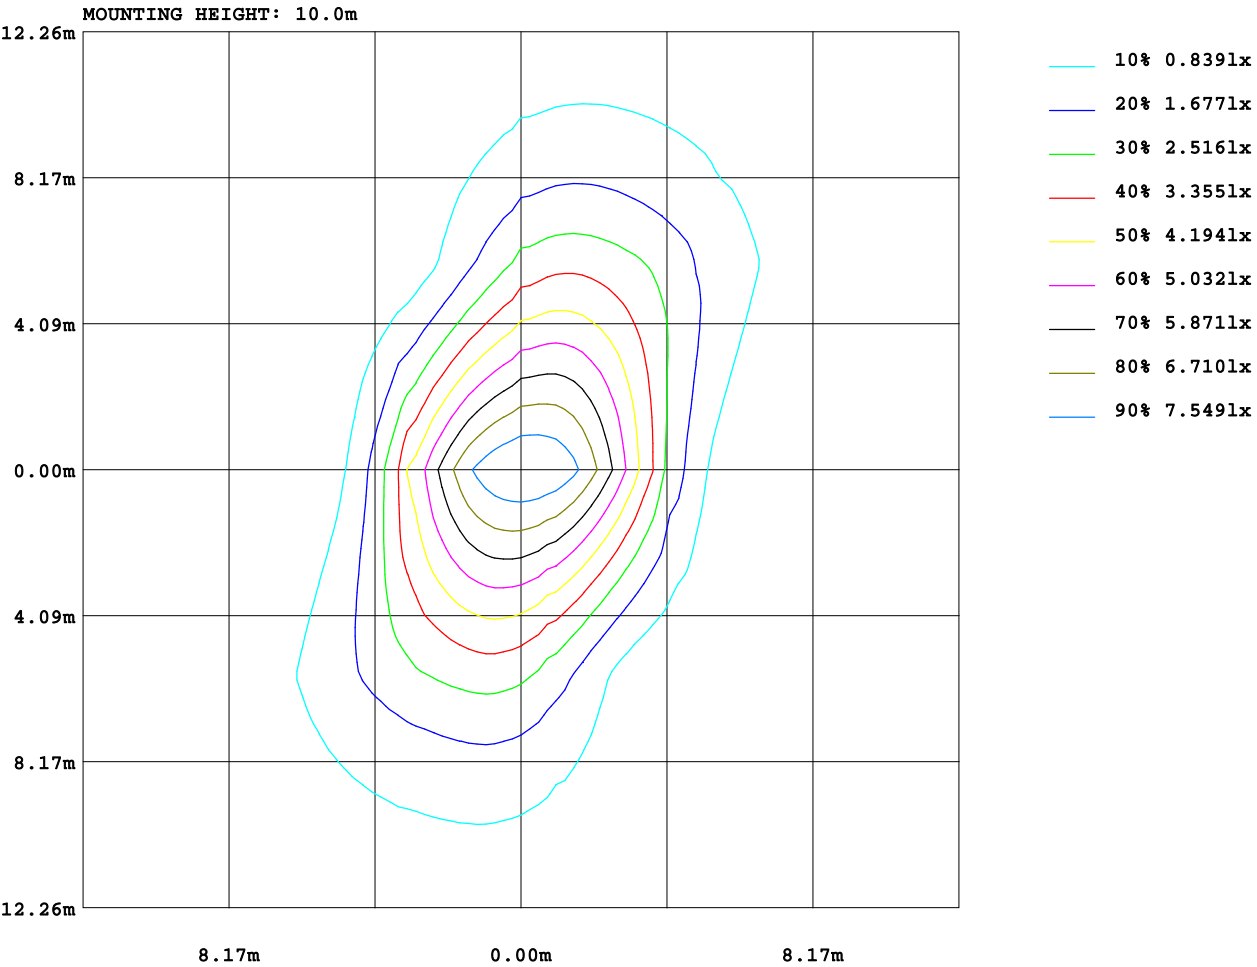

Test System:HOPOO HPG1900
Temperature:25.3DEG
Operators:
Test Date:2024年07月19日

Test Set: 8.0deg/s B-Beta (TYPE B)
Humidity:65.0%
Test Distance:10.500 m
Remarks: