



**LI-TIAN LIGHTIN**



# Fully shielded saving illumination

Heavy duty die-cast aluminum housing and door. The door frame is fully gasketed to keep out moisture and dust for the luminaire. Specular thermoplastic reflector and clear glass lens. Integral secondary heat sink to optimize thermal transfer and maximize performance and life of LED. Driver is mounted in direct contact with the casting for a low operating temperature and long life.


**An ideal choice for any indoor or outdoor wall mounted application.**

# Fully shielded LED



- ETL, cETL listed
- 1519LM 15W
- 2200LM 20W
- 2808LM 25W
- 120-277VAC
- 3000K, 4000K, 5000K CCT standard
- High performance CREE LEDs
- Black finish standard
- 5 years warranty
- Options: swivel photocell

## size

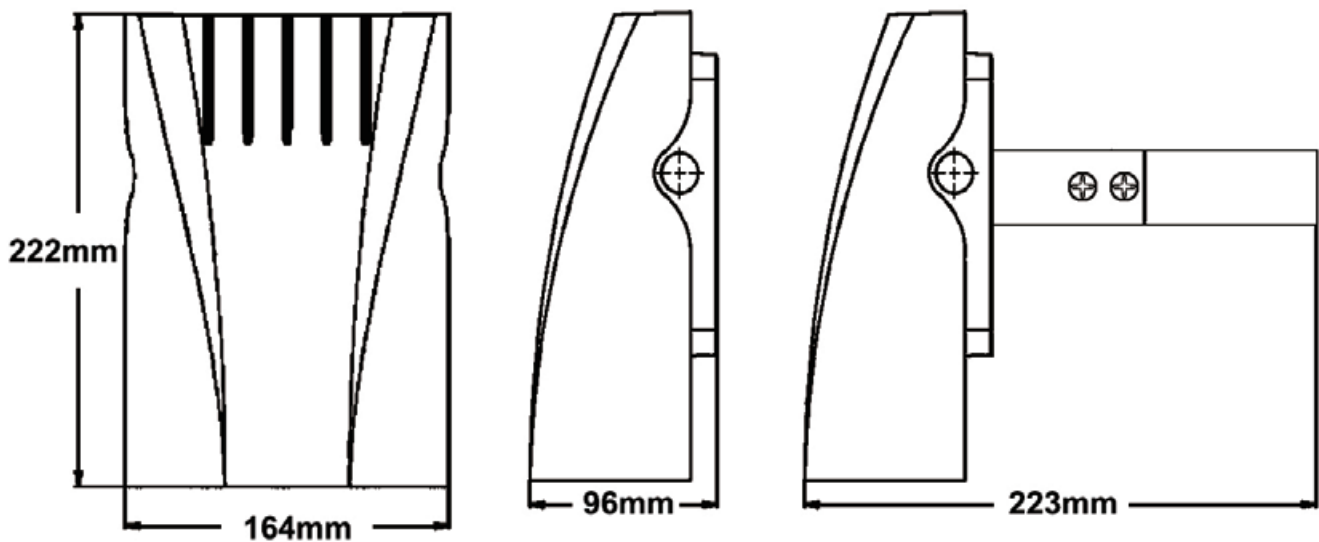

See how Litan LED luminaires can provide a complete solution for your area lighting needs. Visit [www.ilitianled.com](http://www.ilitianled.com) more information.