

LED Grow Light


- Commercial Grade



Switch from HPS to LED Grow Lights and increase your yields & profits 30 - 70+%


Without adding any additional heat, energy costs or cooling requirements.

Growcraft Yield Max Spectrum

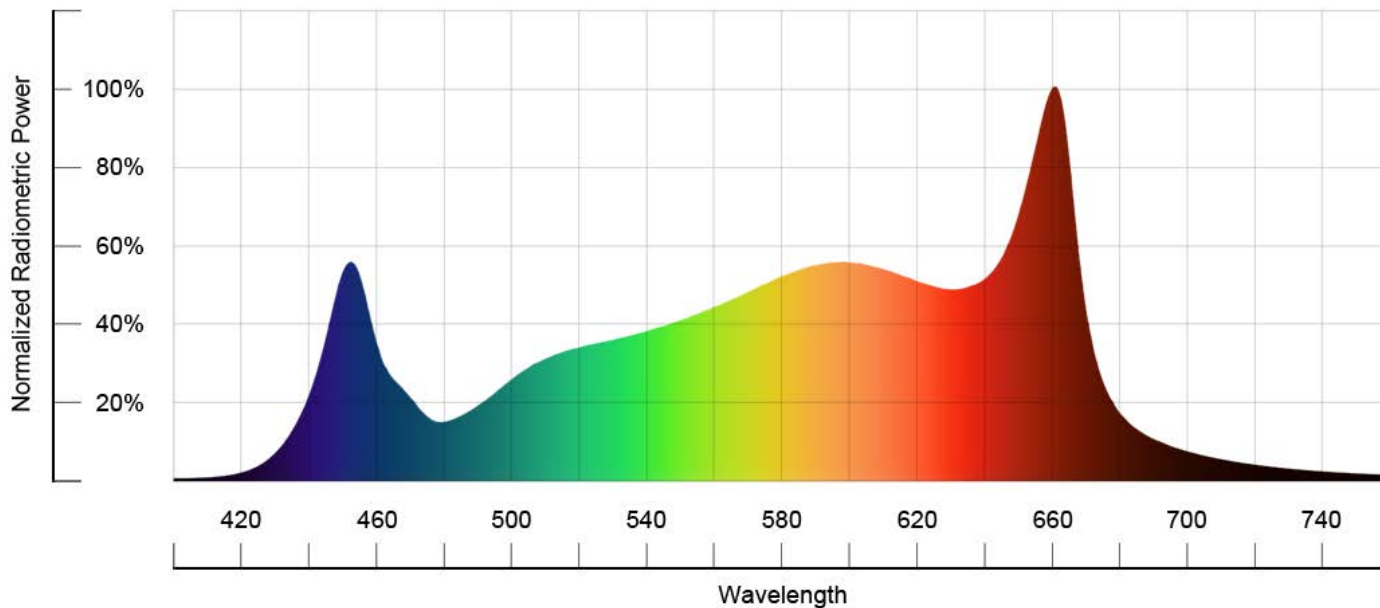


2ft x 4ft Canopy

LT-X2-330W LED Grow Light – Commercial Grade

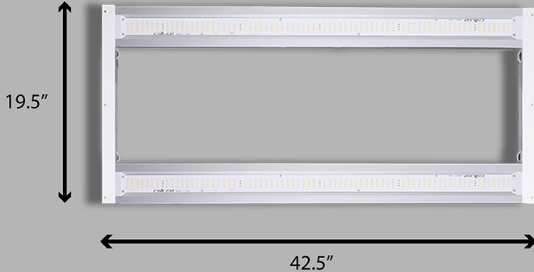

Item Included

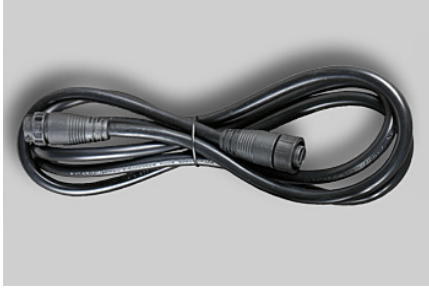

1 x Push Lock 7ft Driver Extension Cable




1 x Push-Lock INVETR NICS EUK-320S670DT



1 x Push Lock AC Power Cord



1 x Push-Lock Dimmer Pot

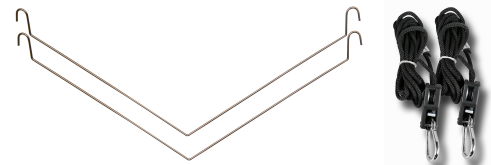

2 x 3/16in Rope Ratchet – Metal Mechanism

Specification



LI-TIAN LIGHTING


| | |
|-----------------------------|---|
| Input Power Draw | 330W |
| Input Voltage Range | 90-305 VAC |
| 120 VAC Current Draw | 2.8 Amps |
| 208 VAC Current Draw | 1.6 Amps |
| 240 VAC Current Draw | 1.4 Amps |
| 277 VAC Current Draw | 1.2 Amps |
| Power Driver | INVETR NICS EUK-320S670DT |
| AC Power Cord Length | 6.5 ft |
| DC Extension Cord Length | 7 ft |
| Dimming Range | 10-100% |
| Light Engine Efficacy | 3.26 $\mu\text{mole/J}$ – 2.73 $\mu\text{mole/J}$ |
| Power Driver Efficiency | 95% @ 230 VAC |
| Linear Power Control | 33W – 330W dimmable range |
| Full System Efficacy | 3.1 $\mu\text{mole/J}$ – 2.6 $\mu\text{mole/J}$ |
| Operating Temperature Range | 41°F – 95°F 5°C – 35°C |
| Operating Humidity Range | 10 – 90% Non-Condensing |
| Generated Heat Load | 1,126 BTU/Hour |
| Fixture Dimensions | 42.5 in x 19.5 in x 1.375 in |
| Fixture Weight | 7KG |

Minimum Head Space Above Fixture: 6 in

Recommended Hanging Height: 12-24 in

Coverage Area: 2 x 4 ft

Start Slow – Growcraft lights have VERY high light output and unless your plants are already acclimated to high light intensity, it is best to start slow with the light hanging high and possibly also dimmed. Then monitor plant reaction over a few days and slowly adjust as needed.

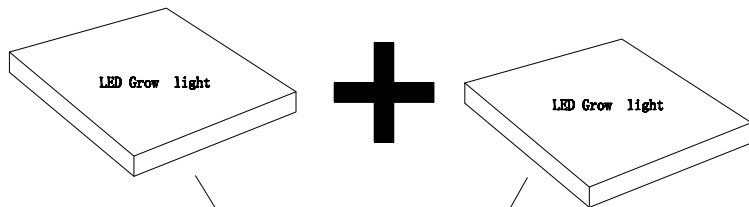

300W 17KG

LED Grow light + LED Drive = 20.5KG

